





REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2024.06.01	JIM.KING

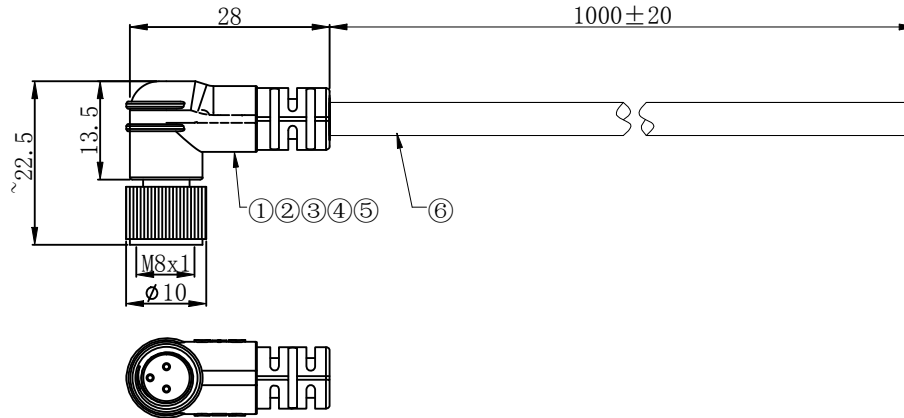

P1	Wire color
1	brown
3	blue
4	black
Shell	braid

General Specifications

Connector locking system: Screw
 Termination: Solder
 Temperature range: -20°C ~ +80°C
 Mating cycles: > 100
 Rated voltage: 50 V AC/ 60 V DC
 Rated current: 3A
 Contact resistance: ≤5 mΩ
 Insulation resistance: ≥100 MΩ

6	Cable	UL2464 24AWG*3C+AL+BRAID, Jacket: PVC ,Black	1
5	O-ring	Rubber,Black	1
4	Molding	PVC, Black	1
3	Screw	M8*1.0 screw thread, brass with nickel plated	1
2	Contact	Brass, female Pin,Gold Flash	3
1	Connector	M8 female 3pin Connector Insert	1
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 -120mm ± 0.30mm	RENHOTEC GROUP				
	PART DESCRIPTION: R/A M8 3P Female ,Shielded				
Appd: JIM.KING	P/N: EB-400-1051				
Check:	Date	Scale	Unit	Type	Page
Draw: Ding	2024.06.01	Free	MM	Z	1/1