





ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2024/06/01	JIM.KING

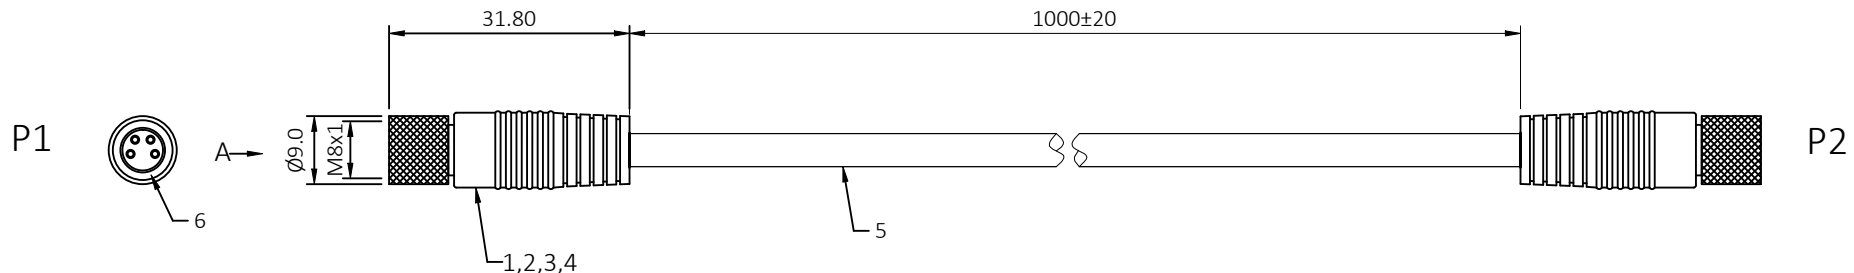

Pin Assignment
Front View
M8 female A-Coding 4PIN

PIN OUT		
P1	WIRE COLOR	P2
1	BROWN	1
2	WHITE	2
3	BLUE	3
4	Black	4

- Specifications:
- 1.IP rating: IP67
 - 2.Ambient temperature: -20℃~+80℃
 - 3.Mating endurance: >500cycles
 - 4.Rated voltage: 50V AC/60V DC
 - 5.Rated current:3A
 - 6.Contact resistance: *5mΩ
 - 7.Insulation resistance:/ 100 MΩ

6	O-ring	Rubber,black	2
5	Cable	UL2464 AWG22*4C,Jacket:PVC Black	1
4	Molding	PVC, black	1
3	Screw nut	M8*1.0 screw inner thread, brass with nickel plated	2
2	Pin	Brass, Female Pin,Gold Flash	8
1	Connector	M8 Female 4pin Connector	2
No.	PART NAME	DESCRIPTION	Q'TY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm	RENHOTEC GROUP				
	PART DESCRIPTION: Double M8 4P FEMALE				
Appr: JIM.KING	P/N: EB-400-1189				
Check:	Date	Scale	Unit	Type	Page
Draw: DING	2024.06.01	Free	MM	Z	1/1