





REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Ding	2024/06/08	JIM. KING

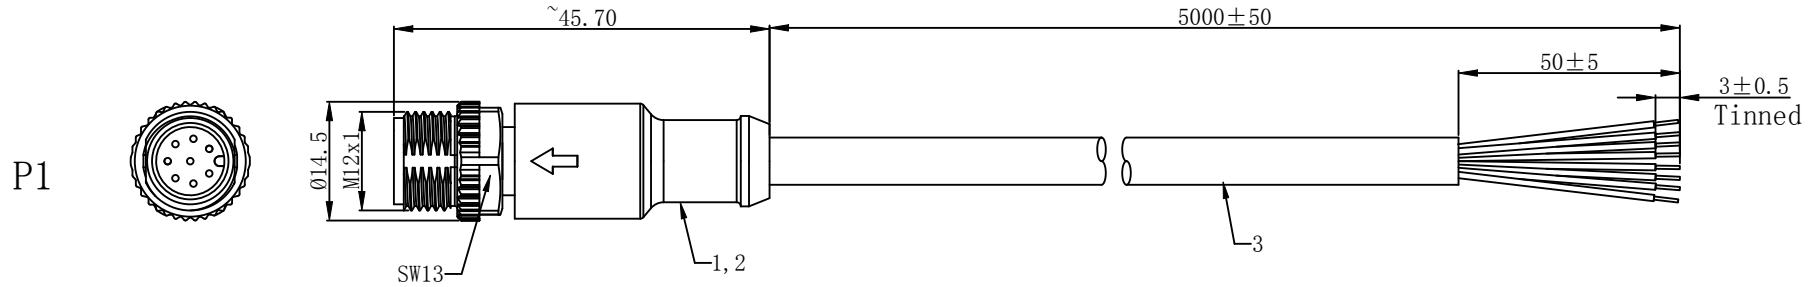

P1 Wire List

PIN 1	WHITE
PIN 2	BROWN
PIN 3	GREEN
PIN 4	YELLOW
PIN 5	GREY
PIN 6	PINK
PIN 7	BLUE
PIN 8	RED



Pin Assignment
Front View
MALE

- Specifications:
- IP rating: IP67
 - Ambient temperature: -25°C~+80°C
 - Mating endurance: >500cycles
 - Rated voltage: 30V AC/DC
 - Rated current: 2A
 - Contact resistance: ≤5mΩ
 - Insulation resistance: ≥100 MΩ

3	Cable	UL2464 24AWG*8C, Jacket:PVC BLACK	1
2	Molding	PVC, Black	1
1	Connector	M12 male 8pin Connector	1
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED			RENHOTEC GROUP			
	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm		PART DESCRIPTION: M12 8P Male			
Appd: JIM. KING	P/N: EB-400-2341					
Check:	Date	Scale	Unit	Type	Page	
Draw: Ding	2024.06.08	Free	MM	Z	1/1	